


UTILITY/ATV/UTV FIT SERIES

TRITON
TRAILERS

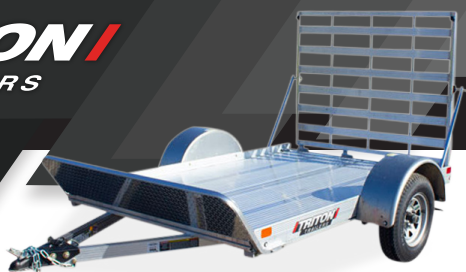

FIT852

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 52x8 FRAME ASSEMBLY ONLY	FIT 52x8	FIT 52x8	FIT 52x8	FIT 52x8
Model Number	FIT852-FRAME	FIT852-SM	FIT852-SM2	FIT852-A	FIT852-A2
Bed Width (in.)	52"	52"	52"	52"	52"
Bed Length (in.)	96"	96"	96"	96"	96"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	73 3/32"	73 3/32"	73 3/32"	73 3/32"	73 3/32"
Overall Length (in.)	134"	134"	134"	134"	134"
Ramp Standard	Straight	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	1,818 lb	1,818 lb	1,818 lb	1,818 lb	1,818 lb
GVWR w/o Brakes (lb.)	2,200 lb	2,200 lb	2,200 lb	2,200 lb	2,200 lb
Carrying Capacity w/ Brakes (lb.)	--	--	--	--	--
GVWR with Brakes (lb.)	--	--	--	--	--
Trailer Weight	382 lb	382 lb	382 lb	382 lb	382 lb
Axle(s) - Qty/Rating	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler
Hitch Height (in.)	15 3/4"	15 3/4"	15 3/4"	15 3/4"	15 3/4"
Deck Height (in.)	18"	18"	18"	18"	18"
Wheels	--	13" Silver Mod	13" Silver Mod	13" Aluminum	13" Aluminum
Tires	--	ST175/80D13C	ST175/80R13C	ST175/80D13C	ST175/80R13C
Tongue Jack	Option	Option	Option	Option	Option
Coupler (.in)	2"	2"	2"	2"	2"
Brake Standard	--	--	--	--	--
Brake Options	--	--	--	--	--

OPTIONS & ACCESSORIES

OPTIONS
Bi-Fold Ramp Upgrade (FIT/Flexhaul 52")
Kit, Stoneguard 52 (Order with Front Rail 22473-52) (FIT/Flexhaul 52")
Tongue Jack
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)

Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 52")
Kit, Side Rail 852, 864 (Order with Wheel Stop 22359-52 or 22359-64)
Kit, Solid Front 52 (FIT/Flexhaul 52")
Kit, Solid Front and Fence-Style Sidel 852 (FIT/Flexhaul)
Kit, Short Solid Front and Side 852 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 852
Kit, Wheel Stop - 52" (FIT/Flexhaul 52")
Kit, Spare Tire Carrier

FIT864

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 64x10 FRAME ASSEMBLY ONLY	FIT 64x10	FIT 64x10	FIT 64x10	FIT 64x10
Model Number	FIT1064-FRAME	FIT1064-SM	FIT1064-SM2	FIT1064-A	FIT1064-A2
Bed Width (in.)	64"	64"	64"	64"	64"
Bed Length (in.)	120"	120"	120"	120"	120"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	85 5/32"	85 5/32"	85 5/32"	85 5/32"	85 5/32"
Overall Length (in.)	158"	158"	158"	158"	158"
Ramp Standard	Straight	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	1,723 lb	1,723 lb	1,723 lb	1,723 lb	1,723 lb
GVWR w/o Brakes (lb.)	2,200 lb	2,200 lb	2,200 lb	2,200 lb	2,200 lb
Carrying Capacity w/ Brakes (lb.)	--	--	--	--	--
GVWR with Brakes (lb.)	--	--	--	--	--
Trailer Weight	477 lb	477 lb	477 lb	477 lb	477 lb
Axle(s) - Qty/Rating	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler
Hitch Height (in.)	15 3/4"	15 3/4"	15 3/4"	15 3/4"	15 3/4"
Deck Height (in.)	18"	18"	18"	18"	18"
Wheels	--	13" Silver Mod	13" Silver Mod	13" Aluminum	13" Aluminum
Tires	--	ST175/80D13C	ST175/80R13C	ST175/80D13C	ST175/80R13C
Tongue Jack	Option	Option	Option	Option	Option
Coupler (.in)	2"	2"	2"	2"	2"
Brake Standard	--	--	--	--	--
Brake Options	--	--	--	--	--

OPTIONS & ACCESSORIES

OPTIONS
Bi-Fold Ramp Upgrade (FIT/Flexhaul 64")
Kit, Stoneguard 64 (Order with Front Rail 22473-64) (FIT/Flexhaul 64")
Tongue Jack
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)

Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 64")
Kit, Side Rail 852, 864 (Order with Wheel Stop 22359-52 or 22359-64)
Kit, Solid Front 64 (FIT/Flexhaul 64")
Kit, Solid Front and Fence-Style Side 864 (FIT/Flexhaul)
Kit, Short Solid Front and Side 864 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 864
Kit, Wheel Stop - 64" (FIT/Flexhaul 64")
Kit, Spare Tire Carrier

FIT1064

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 64x10 FRAME ASSEMBLY ONLY	FIT 64x10	FIT 64x10	FIT 64x10	FIT 64x10
Model Number	FIT1064-FRAME	FIT1064-SM	FIT1064-SM2	FIT1064-A	FIT1064-A2
Bed Width (in.)	64"	64"	64"	64"	64"
Bed Length (in.)	120"	120"	120"	120"	120"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	85 5/32"	85 5/32"	85 5/32"	85 5/32"	85 5/32"
Overall Length (in.)	158"	158"	158"	158"	158"
Ramp Standard	Straight	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	1,723 lb	1,723 lb	1,723 lb	1,723 lb	1,723 lb
GVWR w/o Brakes (lb.)	2,200 lb	2,200 lb	2,200 lb	2,200 lb	2,200 lb
Carrying Capacity w/ Brakes (lb.)	--	--	--	--	--
GVWR with Brakes (lb.)	--	--	--	--	--
Trailer Weight	477 lb	477 lb	477 lb	477 lb	477 lb
Axle(s) - Qty/Rating	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler
Hitch Height (in.)	15 3/4"	15 3/4"	15 3/4"	15 3/4"	15 3/4"
Deck Height (in.)	18"	18"	18"	18"	18"
Wheels	--	13" Silver Mod	13" Silver Mod	13" Aluminum	13" Aluminum
Tires	--	ST175/80D13C	ST175/80R13C	ST175/80D13C	ST175/80R13C
Tongue Jack	Option	Option	Option	Option	Option
Coupler (.in)	2"	2"	2"	2"	2"
Brake Standard	--	--	--	--	--
Brake Options	--	--	--	--	--

OPTIONS & ACCESSORIES

OPTIONS
Bi-Fold Ramp Upgrade (FIT/Flexhaul 64")
Kit, Stoneguard 64 (Order with Front Rail 22473-64) (FIT/Flexhaul 64")
Tongue Jack
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)

Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 64")
Kit, Side Rail 1064, 1072 (Order with Wheel Stop 22359-64 or 22359-72) (FIT/Flexhaul)
Kit, Solid Front 64 (FIT/Flexhaul 64")
Kit, Solid Front and Fence-Style Side 1064 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1064 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1064
Kit, Wheel Stop - 64" (FIT/Flexhaul 64")
Kit, Spare Tire Carrier

FIT1072

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 72x10 FRAME ASSEMBLY ONLY	FIT 72x10	FIT 72x10	FIT 72x10
Model Number	FIT1072-FRAME	FIT1072-SM	FIT1072-SM2	FIT1072-A
Bed Width (in.)	72 1/2"	72 1/2"	72 1/2"	72 1/2"
Bed Length (in.)	120"	120"	120"	120"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	93 25/32"	93 25/32"	93 25/32"	93 25/32"
Overall Length (in.)	158"	158"	158"	158"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	2,472 lb	2,472 lb	2,472 lb	2,472 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,977 lb	2,977 lb	2,977 lb	2,977 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	523 lb	523 lb	523 lb	523 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	17"	17"	17"	17"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	--	--	--
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS
Upgrade to Electric Brakes (One Axle) FIT / Flexhaul 72, 81
Bi-Fold Ramp Upgrade (FIT/Flexhaul 72")
Kit, Stoneguard 72 (Order with Front Rail 22473-72) (FIT/Flexhaul 72")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)

Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 72")
Kit, Side Rail 1064, 1072 (Order with Wheel Stop 22359-64 or 22359-72) (FIT/Flexhaul)
Kit, Solid Front 72 (FIT/Flexhaul 72")
Kit, Solid Front and Fence-Style Side 1072 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1072 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1072
Kit, Wheel Stop - 72" (FIT/Flexhaul 72")
Kit, Spare Tire Carrier

FIT1272

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 72x12 FRAME ASSEMBLY ONLY	FIT 72x12	FIT 72x12	FIT 72x12
Model Number	FIT1272-FRAME	FIT1272-SM	FIT1272-SM2	FIT1272-A
Bed Width (in.)	72 1/2"	72 1/2"	72 1/2"	72 1/2"
Bed Length (in.)	144"	144"	144"	144"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	93 25/32"	93 25/32"	93 25/32"	93 25/32"
Overall Length (in.)	182"	182"	182"	182"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	2,399 lb	2,399 lb	2,399 lb	2,399 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,909 lb	2,909 lb	2,909 lb	2,909 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	596 lb	596 lb	596 lb	596 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	17"	17"	17"	17"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	--	--	--
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS	
Upgrade to Electric Brakes (One Axle) FIT / Flexhaul 72, 81	Quickslide Wheel Chock Kit **N/A on Plank Models**
Bi-Fold Ramp Upgrade (FIT/Flexhaul 72")	Kit, Front Rail (FIT/Flexhaul 72")
Kit, Stoneguard 72 (Order with Front Rail 22473-72) (FIT/Flexhaul 72")	Kit, Side Rail 1272, 1281 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)	Kit, Solid Front 72 (FIT/Flexhaul 72")
Kit, Quickslide Tie Down - Eyebolt (2 PCS)	Kit, Solid Front and Fence-Style Side 1272 (FIT/Flexhaul)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)	Kit, Short Solid Front and Side 1272 (FIT/Flexhaul)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)	Kit, Tall Solid Front and Side 1272
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)	Kit, Wheel Stop - 72" (FIT/Flexhaul 72")
	Kit, Spare Tire Carrier

FIT1472

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 72x14 FRAME ASSEMBLY ONLY	FIT 72x14	FIT 72x14	FIT 72x14
Model Number	FIT1472-FRAME	FIT1472-SM	FIT1472-SM2	FIT1472-A
Bed Width (in.)	72 1/2"	72 1/2"	72 1/2"	72 1/2"
Bed Length (in.)	168"	168"	168"	168"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	93 25/32"	93 25/32"	93 25/32"	93 25/32"
Overall Length (in.)	206"	206"	206"	206"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	2,311 lb	2,311 lb	2,311 lb	2,311 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,816 lb	2,816 lb	2,816 lb	2,816 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	684 lb	684 lb	684 lb	684 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	--	--	--
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS	
Upgrade to Electric Brakes (One Axle) FIT / Flexhaul 72, 81	Quickslide Wheel Chock Kit **N/A on Plank Models**
Bi-Fold Ramp Upgrade (FIT/Flexhaul 72")	Kit, Front Rail (FIT/Flexhaul 72")
Kit, Stoneguard 72 (Order with Front Rail 22473-72) (FIT/Flexhaul 72")	Kit, Side Rail 1472, 1481 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)	Kit, Solid Front 72 (FIT/Flexhaul 72")
Kit, Quickslide Tie Down - Eyebolt (2 PCS)	Kit, Solid Front and Fence-Style Side 1472 (FIT/Flexhaul)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)	Kit, Short Solid Front and Side 1472 (FIT/Flexhaul)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)	Kit, Tall Solid Front and Side 1472
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)	Kit, Wheel Stop - 72" (FIT/Flexhaul 72")
	Kit, Spare Tire Carrier

FIT1281

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x12 FRAME ASSEMBLY ONLY	FIT 81x12	FIT 81x12	FIT 81x12
Model Number	FIT1281-FRAME	FIT1281-SM	FIT1281-SM2	FIT1281-A
Bed Width (in.)	80-3/4"	80-3/4"	80-3/4"	80-3/4"
Bed Length (in.)	144"	144"	144"	144"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	101 29/32"	101 29/32"	101 29/32"	101 29/32"
Overall Length (in.)	182"	182"	182"	182"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	2,261 lb	2,261 lb	2,261 lb	2,261 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,766 lb	2,766 lb	2,766 lb	2,766 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	734 lb	734 lb	734 lb	734 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	--	--	--
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS
Upgrade to Electric Brakes (One Axle) FIT / Flexhaul 72, 81
Bi-Fold Ramp Upgrade (FIT/Flexhaul 81")
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)

Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 81")
Kit, Side Rail 1272, 1281 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Solid Front and Fence-Style Side 1281 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1281 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1281
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Spare Tire Carrier
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul

FIT1481

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x14 FRAME ASSEMBLY ONLY	FIT 81x14	FIT 81x14	FIT 81x14
Model Number	FIT1481-FRAME	FIT1481-SM	FIT1481-SM2	FIT1481-A
Bed Width (in.)	80-3/4"	80-3/4"	80-3/4"	80-3/4"
Bed Length (in.)	168"	168"	168"	168"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	101 29/32"	101 29/32"	101 29/32"	101 29/32"
Overall Length (in.)	206"	206"	206"	206"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	2,188 lb	2,188 lb	2,188 lb	2,188 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,693 lb	2,693 lb	2,693 lb	2,693 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	807 lb	807 lb	807 lb	807 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	--	--	--
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS
Upgrade to Electric Brakes (One Axle) FIT / Flexhaul 72, 81
Bi-Fold Ramp Upgrade (FIT/Flexhaul 81")
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 81")

HD Bi-Fold Ramp Upgrade (FIT/Flexhaul 81")
Kit, Side Rail 1472, 1481 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Solid Front and Fence-Style Side 1481 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1481 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1481
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Spare Tire Carrier
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 1481 - FIT/Flexhaul

FIT1481-5K / FIT1681-5K

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (5) Quickslides
- > (4) Quickslide D-Rings
- > HD Bi-Fold Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2-5/16" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x14 5K	FIT 81x16 5K
Model Number	FIT1481-5K-A	FIT1681-5K-A
Bed Width (in.)	80-3/4"	80-3/4"
Bed Length (in.)	168"	192"
Deck Type	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings
Overall Width (in.)	101 29/32"	102"
Overall Length (in.)	206"	206"
Ramp Standard	Bifold HD	Bifold HD
Ramp Option	--	--
Tilt Bed	No	No
Carrying Capacity w/o Brakes (lb.)	--	--
GVWR w/o Brakes (lb.)	--	--
Carrying Capacity w/ Brakes (lb.)	2,693 lb	5,785 lb
GVWR with Brakes (lb.)	5,200 lb	5,200 lb
Trailer Weight	1,020 lb	1,110 lb
Axle(s) - Qty/Rating	1-5200# Braked	1-5200# Braked
Hitch Height (in.)	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"
Wheels	15" Aluminum	15" Aluminum
Tires	ST225/75R15C	ST225/75R15C
Tongue Jack	Yes	Yes
Coupler (.in)	2 5/16"	2 5/16"
Brake Standard	N/A	Electric
Brake Options	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS
Bi-Fold Ramp Upgrade (FIT/Flexhaul 81")
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Quickslide Wheel Chock Kit **N/A on Plank Models**

Kit, Front Rail (FIT/Flexhaul 81")
Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Side Rail 1472, 1481 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Solid Front and Fence-Style Side 1481 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1481 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1481
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Spare Tire Carrier
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 1481 - FIT/Flexhaul

FIT1481-2

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (5) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > HD Bi-Fold Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2-5/16" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x14 2 FRAME ASSEMBLY ONLY	FIT 81x14 2	FIT 81x14 2	FIT 81x14 2
Model Number	FIT1481-2-FRAME	FIT1481-2-SM	FIT1481-2-SM2	FIT1481-2-A
Bed Width (in.)	80-3/4"	80-3/4"	80-3/4"	80-3/4"
Bed Length (in.)	168"	168"	168"	168"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	102"	102"	102"	102"
Overall Length (in.)	206"	206"	206"	206"
Ramp Standard	Bifold HD	Bifold HD	Bifold HD	Bifold HD
Ramp Option	N/A	N/A	N/A	N/A
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	--	--	--	--
GVWR w/o Brakes (lb.)	--	--	--	--
Carrying Capacity w/ Brakes (lb.)	5,875 lb	5,875 lb	5,875 lb	5,875 lb
GVWR with Brakes (lb.)	7,000 lb	7,000 lb	7,000 lb	7,000 lb
Trailer Weight	1,125 lb	1,125 lb	1,125 lb	1,125 lb
Axle(s) - Qty/Rating	2-3500# Braked	2-3500# Braked	2-3500# Braked	2-3500# Braked
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2 5/16"	2 5/16"	2 5/16"	2 5/16"
Brake Standard	--	Electric - Front	Electric - Front	Electric - Front
Brake Options	--	Electric - Front & Rear	Electric - Front & Rear	Electric - Front & Rear

OPTIONS & ACCESSORIES

OPTIONS
Bi-Fold Ramp Upgrade (FIT/Flexhaul 81")
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 81")

Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Side Rail 1472, 1481 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Solid Front and Fence-Style Side 1481 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1481 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1481
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Spare Tire Carrier
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 1481 - FIT/Flexhaul

FIT1681-2

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (5) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > HD Bi-Fold Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2-5/16" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x16 2 FRAME ASSEMBLY ONLY	FIT 81x16 2	FIT 81x16 2	FIT 81x16 2
Model Number	FIT1681-2-FRAME	FIT1681-2-SM	FIT1681-2-SM2	FIT1681-2-A
Bed Width (in.)	80-3/4"	80-3/4"	80-3/4"	80-3/4"
Bed Length (in.)	192"	192"	192"	192"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	102"	102"	102"	102"
Overall Length (in.)	230"	230"	230"	230"
Ramp Standard	Bifold HD	Bifold HD	Bifold HD	Bifold HD
Ramp Option	N/A	N/A	N/A	N/A
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	--	--	--	--
GVWR w/o Brakes (lb.)	--	--	--	--
Carrying Capacity w/ Brakes (lb.)	5,785 lb	5,785 lb	5,785 lb	5,785 lb
GVWR with Brakes (lb.)	7,000 lb	7,000 lb	7,000 lb	7,000 lb
Trailer Weight	1,215 lb	1,215 lb	1,125 lb	1,125 lb
Axle(s) - Qty/Rating	2-3500# Braked	2-3500# Braked	2-3500# Braked	2-3500# Braked
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2 5/16"	2 5/16"	2 5/16"	2 5/16"
Brake Standard	--	Electric - Front	Electric - Front	Electric - Front
Brake Options	--	Electric - Front & Rear	Electric - Front & Rear	Electric - Front & Rear

OPTIONS & ACCESSORIES

OPTIONS
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 81")
Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Spare Tire Carrier

Kit, Side Rail 1681 (Order with Wheel Stop 22359-81) (FIT/Flexhaul)
Kit, Solid Front and Fence-Style Side 1681 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1681 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1681
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 1681 - FIT/Flexhaul
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 1481 - FIT/Flexhaul
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul

FIT2081-2

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (5) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > HD Bi-Fold Ramp
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 2-5/16" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x20 2 FRAME ASSEMBLY ONLY	FIT 81x20 2	FIT 81x20 2
Model Number	FIT2081-2-FRAME	FIT2081-2-SM2	FIT2081-2-A
Bed Width (in.)	80-3/4"	80-3/4"	80-3/4"
Bed Length (in.)	240"	240"	240"
Deck Type	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	102"	102"	102"
Overall Length (in.)	245"	245"	245"
Ramp Standard	Bifold HD	Bifold HD	Bifold HD
Ramp Option	N/A	N/A	N/A
Tilt Bed	No	No	No
Carrying Capacity w/o Brakes (lb.)	--	--	--
GVWR w/o Brakes (lb.)	--	--	--
Carrying Capacity w/ Brakes (lb.)	5,875 lb	5,875 lb	5,875 lb
GVWR with Brakes (lb.)	7,000 lb	7,000 lb	7,000 lb
Trailer Weight	1,395 lb	1,395 lb	1,395 lb
Axle(s) - Qty/Rating	2-3500# Braked	2-3500# Braked	2-3500# Braked
Hitch Height (in.)	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C
Tongue Jack	Yes	Yes	Yes
Coupler (.in)	2 5/16"	2 5/16"	2 5/16"
Brake Standard	--	Electric - Front	Electric - Front
Brake Options	--	Electric - Front & Rear	Electric - Front & Rear

OPTIONS & ACCESSORIES

OPTIONS
Kit, Spare Tire Carrier
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)

Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 81")
Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Side Rail 2081 (Order with Wheel Stop 22359-81) (FIT/Flexhaul)
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 2081 - Flexhaul

FIT864-PLANK

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (2) Quickslides (Side Rails)
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > Hardwood Plank Decking
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 64x8 PLANK FRAME ASSEMBLY ONLY	FIT 64x8 PLANK	FIT 64x8 PLANK	FIT 64x8 PLANK	FIT 64x8 PLANK
Model Number	FIT864-PLANK-FRAME	FIT864-PLANK-SM	FIT864-PLANK-SM2	FIT864-PLANK-A	FIT864-PLANK-A2
Bed Width (in.)	64"	64"	64"	64"	64"
Bed Length (in.)	96"	96"	96"	96"	96"
Deck Type	Hardwood Planks	Hardwood Planks	Hardwood Planks	Hardwood Planks	Hardwood Planks
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	85 5/32"	85 5/32"	85 5/32"	85 5/32"	85 5/32"
Overall Length (in.)	134"	134"	134"	134"	134"
Ramp Standard	Straight	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	1,743 lb	1,743 lb	1,743 lb	1,743 lb	1,743 lb
GVWR w/o Brakes (lb.)	2,200 lb	2,200 lb	2,200 lb	2,200 lb	2,200 lb
Carrying Capacity w/ Brakes (lb.)	--	--	--	--	--
GVWR with Brakes (lb.)	--	--	--	--	--
Trailer Weight	457 lb	457 lb	457 lb	457 lb	457 lb
Axle(s) - Qty/Rating	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler
Hitch Height (in.)	15 3/4"	15 3/4"	15 3/4"	15 3/4"	15 3/4"
Deck Height (in.)	18"	18"	18"	18"	18"
Wheels	--	13" Silver Mod	13" Silver Mod	13" Aluminum	13" Aluminum
Tires	--	ST175/80D13C	ST175-80R13C	ST175/80D13C	ST175-80R13C
Tongue Jack	Option	Option	Option	Option	Option
Coupler (.in)	2"	2"	2"	2"	2"
Brake Standard	--	N/A	N/A	N/A	N/A
Brake Options	--	N/A	N/A	N/A	N/A

OPTIONS & ACCESSORIES

OPTIONS
Bi-Fold Ramp Upgrade (FIT/Flexhaul 64")
Kit, Stoneguard 64 (Order with Front Rail 22473-64) (FIT/Flexhaul 64")
Tongue Jack
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)

Kit, Front Rail (FIT/Flexhaul 64")
Kit, Side Rail 852, 864 (Order with Wheel Stop 22359-52 or 22359-64)
Kit, Solid Front 64 (FIT/Flexhaul 64")
Kit, Solid Front and Fence-Style Side 864 (FIT/Flexhaul)
Kit, Short Solid Front and Side 864 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 864
Kit, Wheel Stop - 64" (FIT/Flexhaul 64")
Kit, Spare Tire Carrier

FIT1064-PLANK

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (2) Quickslides (Side Rails)
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > Hardwood Plank Decking
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 64x10 PLANK FRAME ASSEMBLY ONLY	FIT 64x10 PLANK	FIT 64x10 PLANK	FIT 64x10 PLANK	FIT 64x10 PLANK
Model Number	FIT1064-PLANK-FRAME	FIT1064-PLANK-SM	FIT1064-PLANK-SM2	FIT1064-PLANK-A	FIT1064-PLANK-A2
Bed Width (in.)	64"	64"	64"	64"	64"
Bed Length (in.)	120"	120"	120"	120"	120"
Deck Type	Hardwood Planks	Hardwood Planks	Hardwood Planks	Hardwood Planks	Hardwood Planks
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	85 5/32"	85 5/32"	85 5/32"	85 5/32"	85 5/32"
Overall Length (in.)	158"	158"	158"	158"	158"
Ramp Standard	Straight	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	1,690 lb	1,690 lb	1,690 lb	1,690 lb	1,690 lb
GVWR w/o Brakes (lb.)	2,200 lb	2,200 lb	2,200 lb	2,200 lb	2,200 lb
Carrying Capacity w/ Brakes (lb.)	--	--	--	--	--
GVWR with Brakes (lb.)	--	--	--	--	--
Trailer Weight	510 lb	510 lb	510 lb	510 lb	510 lb
Axle(s) - Qty/Rating	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler	1-2200# Idler
Hitch Height (in.)	15 3/4"	15 3/4"	15 3/4"	15 3/4"	15 3/4"
Deck Height (in.)	18"	18"	18"	18"	18"
Wheels	--	13" Silver Mod	13" Silver Mod	13" Aluminum	13" Aluminum
Tires	--	ST175/80D13C	ST175-80R13C	ST175/80D13C	ST175-80R13C
Tongue Jack	Option	Option	Option	Option	Option
Coupler (.in)	2"	2"	2"	2"	2"
Brake Standard	--	N/A	N/A	N/A	N/A
Brake Options	--	N/A	N/A	N/A	N/A

OPTIONS & ACCESSORIES

OPTIONS
Bi-Fold Ramp Upgrade (FIT/Flexhaul 64")
Kit, Stoneguard 64 (Order with Front Rail 22473-64) (FIT/Flexhaul 64")
Tongue Jack
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)

Kit, Spare Tire Carrier
Kit, Front Rail (FIT/Flexhaul 64")
Kit, Side Rail 1064, 1072 (Order with Wheel Stop 22359-64 or 22359-72) (FIT/Flexhaul)
Kit, Solid Front 64 (FIT/Flexhaul 64")
Kit, Solid Front and Fence-Style Side 1064 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1064 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1064
Kit, Wheel Stop - 64" (FIT/Flexhaul 64")

FIT1281-PLANK

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (2) Quickslides (Side Rails)
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > Hardwood Plank Decking
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81X12 PLANK FRAME ASSEMBLY ONLY	FIT 81x12 PLANK	FIT 81x12 PLANK	FIT 81x12 PLANK
Model Number	FIT1281-PLANK-FRAME	FIT1281-PLANK-SM	FIT1281-PLANK-SM2	FIT1281-PLANK-A
Bed Width (in.)	80 3/4"	80 3/4"	80 3/4"	80 3/4"
Bed Length (in.)	144"	144"	144"	144"
Deck Type	Hardwood Planks	Hardwood Planks	Hardwood Planks	Hardwood Planks
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	101 29/32"	101 29/32"	101 29/32"	101 29/32"
Overall Length (in.)	182"	182"	182"	182"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	2,201 lb	2,201 lb	2,201 lb	2,201 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,706 lb	2,706 lb	2,706 lb	2,706 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	794 lb	794 lb	794 lb	794 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Option	Option	Option	Option
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	N/A	N/A	N/A
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS	
Upgrade to Electric Brakes (One Axle) FIT / Flexhaul 72, 81	Kit, Spare Tire Carrier
Bi-Fold Ramp Upgrade (FIT/Flexhaul 81")	Kit, Front Rail (FIT/Flexhaul 81")
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")	Kit, Side Rail 1272, 1281 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)	Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Quickslide Tie Down - Eyebolt (2 PCS)	Kit, Solid Front and Fence-Style Side 1281 (FIT/Flexhaul)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)	Kit, Short Solid Front and Side 1281 (FIT/Flexhaul)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)	Kit, Tall Solid Front and Side 1281
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)	Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
	Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul

FIT1481-PLANK

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (2) Quickslides (Side Rails)
- > (4) Quickslide 5/16" D-Rings
- > Straight Ramp
- > Flush LED Lights
- > Hardwood Plank Decking
- > 2" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x14 PLANK FRAME ASSEMBLY ONLY	FIT 81x14 PLANK	FIT 81x14 PLANK	FIT 81x14 PLANK
Model Number	FIT1481-PLANK-FRAME	FIT1481-PLANK-SM	FIT1481-PLANK-SM2	FIT1481-PLANK-A
Bed Width (in.)	80 3/4"	80 3/4"	80 3/4"	80 3/4"
Bed Length (in.)	168"	168"	168"	168"
Deck Type	Hardwood Planks	Hardwood Planks	Hardwood Planks	Hardwood Planks
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	101 29/32"	101 29/32"	101 29/32"	101 29/32"
Overall Length (in.)	206"	206"	206"	206"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	2,206 lb	2,206 lb	2,206 lb	2,206 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,711 lb	2,711 lb	2,711 lb	2,711 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	789 lb	789 lb	789 lb	789 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	N/A	N/A	N/A
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS
Upgrade to Electric Brakes (One Axle) FIT / Flexhaul 72, 81
Bi-Fold Ramp Upgrade (FIT/Flexhaul 81")
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Kit, Front Rail (FIT/Flexhaul 81")

Kit, Spare Tire Carrier
Kit, Side Rail 1472, 1481 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Solid Front and Fence-Style Side 1481 (FIT/Flexhaul)
Kit, Short Solid Front and Side 1481 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1481
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 1481 - FIT/Flexhaul

FIT1481-2-PLANK

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > Brakes Standard on 1 Axle, Need Upgrade for 2nd Axle
- > (2) Quickslides (Side Rails)
- > (4) Quickslide 5/16" D-Rings
- > HD Bi-Fold Ramp
- > Flush LED Lights
- > Hardwood Plank Decking
- > 2-5/16" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x14 2 PLANK FRAME ASSEMBLY ONLY	FIT 81x14 2 PLANK	FIT 81x14 2 PLANK	FIT 81x14 2 PLANK
Model Number	FIT1481-2-PLANK-FRAME	FIT1481-2-PLANK-SM	FIT1481-2-PLANK-SM2	FIT1481-2-PLANK-A
Bed Width (in.)	80 3/4"	80 3/4"	80 3/4"	80 3/4"
Bed Length (in.)	168"	168"	168"	168"
Deck Type	Hardwood Planks	Hardwood Planks	Hardwood Planks	Hardwood Planks
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	102"	102"	102"	102"
Overall Length (in.)	206"	206"	206"	206"
Ramp Standard	Bifold HD	Bifold HD	Bifold HD	Bifold HD
Ramp Option	N/A	N/A	N/A	N/A
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	--	--	--	--
GVWR w/o Brakes (lb.)	--	--	--	--
Carrying Capacity w/ Brakes (lb.)	5,862 lb	5,862 lb	5,862 lb	5,862 lb
GVWR with Brakes (lb.)	7,000 lb	7,000 lb	7,000 lb	7,000 lb
Trailer Weight	1,138 lb	1,138 lb	1,138 lb	1,138 lb
Axle(s) - Qty/Rating	2-3500# Braked	2-3500# Braked	2-3500# Braked	2-3500# Braked
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2 5/16"	2 5/16"	2 5/16"	2 5/16"
Brake Standard	--	Electric - Front	Electric - Front	Electric - Front
Brake Options	--	Electric - Front & Rear	Electric - Front & Rear	Electric - Front & Rear

OPTIONS & ACCESSORIES

OPTIONS
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Kit, Front Rail (FIT/Flexhaul 81")
Kit, Spare Tire Carrier

Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Short Solid Front and Side 1481 (FIT/Flexhaul)
Kit, Side Rail 1472, 1481 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Solid Front and Fence-Style Side 1481 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1481
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 1481 - FIT/Flexhaul

FIT1681-2-PLANK

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > Brakes Standard on 1 Axle, Need Upgrade for 2nd Axle
- > (2) Quickslides (Side Rails)
- > (4) Quickslide 5/16" D-Rings
- > HD Bi-Fold Ramp
- > Flush LED Lights
- > Hardwood Plank Decking
- > 2-5/16" A-Frame Coupler
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 81x16 2 PLANK FRAME ASSEMBLY ONLY	FIT 81x16 2 PLANK	FIT 81x16 2 PLANK	FIT 81x16 2 PLANK
Model Number	FIT1681-2-PLANK-FRAME	FIT1681-2-PLANK-SM	FIT1681-2-PLANK-SM2	FIT1681-2-PLANK-A
Bed Width (in.)	80 3/4"	80 3/4"	80 3/4"	80 3/4"
Bed Length (in.)	192"	192"	192"	192"
Deck Type	Hardwood Planks	Hardwood Planks	Hardwood Planks	Hardwood Planks
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	102"	102"	102"	102"
Overall Length (in.)	230"	230"	230"	230"
Ramp Standard	Bifold HD	Bifold HD	Bifold HD	Bifold HD
Ramp Option	N/A	N/A	N/A	N/A
Tilt Bed	No	No	No	No
Carrying Capacity w/o Brakes (lb.)	--	--	--	--
GVWR w/o Brakes (lb.)	--	--	--	--
Carrying Capacity w/ Brakes (lb.)	5,777 lb	5,777 lb	5,777 lb	5,777 lb
GVWR with Brakes (lb.)	7,000 lb	7,000 lb	7,000 lb	7,000 lb
Trailer Weight	1,223 lb	1,223 lb	1,223 lb	1,223 lb
Axle(s) - Qty/Rating	2-3500# Braked	2-3500# Braked	2-3500# Braked	2-3500# Braked
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2 5/16"	2 5/16"	2 5/16"	2 5/16"
Brake Standard	--	Electric - Front	Electric - Front	Electric - Front
Brake Options	--	Electric - Front & Rear	Electric - Front & Rear	Electric - Front & Rear

OPTIONS & ACCESSORIES

OPTIONS
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Kit, Front Rail (FIT/Flexhaul 81")
Kit, Solid Front 81 (FIT/Flexhaul 81")

Kit, Spare Tire Carrier
Kit, Short Solid Front and Side 1681 (FIT/Flexhaul)
Kit, Side Rail 1681 (Order with Wheel Stop 22359-81) (FIT/Flexhaul)
Kit, Solid Front and Fence-Style Side 1681 (FIT/Flexhaul)
Kit, Tall Solid Front and Side 1681
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Solid Front & Side Load Ramps (1281, 1481, 1681, 2081) - FIT/Flexhaul
Kit, Solid Front & Rear Rail Kit and Side Load Ramps 1681 - FIT/Flexhaul

FIT1072-TILT

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (3) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 1072 - TILT FRAME ASSEMBLY ONLY	FIT72x10 TILT	FIT72x10 TILT	FIT72x10 TILT
Model Number	FIT1072-TILT-FRAME	FIT1072-TILT-SM	FIT1072-TILT-SM2	FIT1072-TILT-A
Bed Width (in.)	72"	72"	72"	72"
Bed Length (in.)	120"	120"	120"	120"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	93 25/32"	93 25/32"	93 25/32"	93 25/32"
Overall Length (in.)	158"	158"	158"	158"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	Yes	Yes	Yes	Yes
Carrying Capacity w/o Brakes (lb.)	2,472 lb	2,472 lb	2,472 lb	2,472 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,977 lb	2,977 lb	2,977 lb	2,977 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	523 lb	523 lb	523 lb	523 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	17"	17"	17"	17"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	N/A	N/A	N/A
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS	
Upgrade to 10" Electric Brakes (One Axle) FIT/FHU 1072 Tilt, 1281 Tilt, 1481 Tilt	Kit, Front Rail (FIT/Flexhaul 72")
Kit, Stoneguard 72 (Order with Front Rail 22473-72) (FIT/Flexhaul 72")	Kit, Wheel Stop - 72" (FIT/Flexhaul 72")
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)	Kit, Spare Tire Carrier
Kit, Quickslide Tie Down - Eyebolt (2 PCS)	Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)	Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
	Quickslide Wheel Chock Kit **N/A on Plank Models**

FIT1281-TILT

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (5) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT 1281 - TILT FRAME ASSEMBLY ONLY	FIT81x12 TILT	FIT81x12 TILT	FIT81x12 TILT
Model Number	FIT1281-TILT-FRAME	FIT1281-TILT-SM	FIT1281-TILT-SM2	FIT1281-TILT-A
Bed Width (in.)	80-3/4"	80-3/4"	80-3/4"	80-3/4"
Bed Length (in.)	144"	144"	144"	144"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	101 29/32"	101 29/32"	101 29/32"	101 29/32"
Overall Length (in.)	182"	182"	182"	182"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	Yes	Yes	Yes	Yes
Carrying Capacity w/o Brakes (lb.)	2,261 lb	2,261 lb	2,261 lb	2,261 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,766 lb	2,766 lb	2,766 lb	2,766 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	734 lb	734 lb	734 lb	734 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	N/A	N/A	N/A
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS
Upgrade to 10" Electric Brakes (One Axle) FIT/FHU 1072 Tilt, 1281 Tilt, 1481 Tilt
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)
Kit, Front Rail (FIT/Flexhaul 81")
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")
Kit, Short Solid Front and Side 1281 (FIT/Flexhaul)

Kit, Tall Solid Front and Side 1281 (FIT/Flexhaul)
Kit, Spare Tire Carrier
Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Side Rail 1272, 1281 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Solid Front and Fence-Style Side 1281 (FIT/Flexhaul)

FIT1481-TILT

STANDARD FEATURES

- > All-Aluminum Construction
- > Torsion Ride Suspension
- > (5) Quickslides
- > (4) Quickslide 5/16" D-Rings
- > Flush LED Lights
- > 1" Extruded Aluminum Decking
- > Aluminum Fenders
- > 1200# Swivel Tongue Jack
- > Standard & Optional Tie Downs
- > 5-Year Limited Warranty

STANDARD SPECIFICATIONS

TRAILER MODEL	FIT1481-TILT FRAME ASSEMBLY ONLY	FIT81x14 TILT	FIT81x14 TILT	FIT81x14 TILT
Model Number	FIT1481-TILT-FRAME	FIT1481-TILT-SM	FIT1481-TILT-SM2	FIT1481-TILT-A
Bed Width (in.)	80-3/4"	80-3/4"	80-3/4"	80-3/4"
Bed Length (in.)	168"	168"	168"	168"
Deck Type	Aluminum	Aluminum	Aluminum	Aluminum
Tie Downs	(4) D-Rings	(4) D-Rings	(4) D-Rings	(4) D-Rings
Overall Width (in.)	101 29/32"	101 29/32"	101 29/32"	101 29/32"
Overall Length (in.)	206"	206"	206"	206"
Ramp Standard	Straight	Straight	Straight	Straight
Ramp Option	Bifold	Bifold	Bifold	Bifold
Tilt Bed	Yes	Yes	Yes	Yes
Carrying Capacity w/o Brakes (lb.)	2,188 lb	2,188 lb	2,188 lb	2,188 lb
GVWR w/o Brakes (lb.)	2,995 lb	2,995 lb	2,995 lb	2,995 lb
Carrying Capacity w/ Brakes (lb.)	2,693 lb	2,693 lb	2,693 lb	2,693 lb
GVWR with Brakes (lb.)	3,500 lb	3,500 lb	3,500 lb	3,500 lb
Trailer Weight	807 lb	807 lb	807 lb	807 lb
Axle(s) - Qty/Rating	1-3500# Idler	1-3500# Idler	1-3500# Idler	1-3500# Idler
Hitch Height (in.)	16"	16"	16"	16"
Deck Height (in.)	19 1/4"	19 1/4"	19 1/4"	19 1/4"
Wheels	--	14" Silver Mod	14" Silver Mod	14" Aluminum
Tires	--	ST205/75D14	ST205/75R14C	ST205/75R14C
Tongue Jack	Yes	Yes	Yes	Yes
Coupler (.in)	2"	2"	2"	2"
Brake Standard	--	N/A	N/A	N/A
Brake Options	--	Electric	Electric	Electric

OPTIONS & ACCESSORIES

OPTIONS	
Upgrade to 10" Electric Brakes (One Axle) FIT/FHU 1072 Tilt, 1281 Tilt, 1481 Tilt	Kit, Spare Tire Carrier
Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)	Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)
Kit, Quickslide Tie Down - Eyebolt (2 PCS)	Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)
Kit, Quickslide Tie Down - Flush Mount (2 PCS)	Quickslide Wheel Chock Kit **N/A on Plank Models**
Kit, Front Rail (FIT/Flexhaul 81")	Kit, Side Rail 1472, 1481 (Order with Wheel Stop 22359-72 or 22359-81) (FIT/Flexhaul)
Kit, Stoneguard 81 (Order with Front Rail 22473-81) (FIT/Flexhaul 81")	Kit, Solid Front 81 (FIT/Flexhaul 81")
Kit, Wheel Stop - 81" (FIT/Flexhaul 81")	Kit, Short Solid Front and Side 1481 (FIT/Flexhaul)
Kit, Solid Front and Fence-Style Side 1481 (FIT/Flexhaul)	Kit, Tall Solid Front and Side 1481

ADDITIONAL UTILITY OPTIONS

FIT SERIES ACCESSORIES

Tongue Jack

Quickslide Wheel Chock Kit (N/A Plank Models)

Kit, Carriage Bolt Tie Down - D-Ring 5/16" (2 PCS)

Kit, Quickslide Tie Down - Eyebolt (2 PCS)

FIT 64" SERIES ACCESSORIES

Kit, Wheel Stop 64

Kit, Side Rail 864 (Order with Wheel Stop 22359-64)

Kit, Side Rail 1064 (Order with Wheel Stop 22359-64)

Kit, Solid Front 64

Kit, Solid Front and Fence-Style Side 864

FIT 72" SERIES ACCESSORIES

Kit, Wheel Stop 72

Kit, Side Rail 1072 (Order with Wheel Stop 22359-72)

Kit, Side Rail 1272 (Order with Wheel Stop 22359-72)

Kit, Side Rail 1472 (Order with Wheel Stop 22359-72)

Kit, Solid Front 72

Kit, Solid Front and Fence-Style Side 1072

Kit, Solid Front and Fence-Style Side 1272

FIT 81" SERIES ACCESSORIES

Kit, Wheel Stop 81

Kit, Side Rail 1281 (Order with Wheel Stop 22359-81)

Kit, Side Rail 1481 (Order with Wheel Stop 22359-81)

Kit, Side Rail 1681 (Order with Wheel Stop 22359-81)

Kit, Solid Front 81

Kit, Solid Front and Fence-Style Side 1281

Kit, Solid Front and Fence-Style Side 1481

FIT TILT SERIES ACCESSORIES

Quickslide Tie Down Eyebolt Kit (1 Pair)

Quickslide Tie Down Kit (1 Pair)

3/8" Tie Down Kit (4 PCS)

3/8" D-Ring Tie Down Kit (4 PCS)

Kit, Wheel Stop 81

Wheel Stop Kit, Tilt72 (6" Above Deck)

Spare Tire Carrier Kit

Tall Stone Guard Kit, Tilt72 (Use With #16789)

FIT SERIES ACCESSORIES (CONTINUED)

Kit, Quickslide Tie Down - Flush Mount (2 PCS)

Kit, Quickslide Tie Down - D-Ring 5/16" (2 PCS)

Kit, Quickslide Tie Down - D-Ring 3/8" (2 PCS)

Kit, Spare Tire Carrier

FIT 64" SERIES ACCESSORIES (CONTINUED)

Kit, Solid Front and Fence-Style Side 1064

Kit, Short Solid Front and Side 864

Kit, Short Solid Front and Side 1064

Kit, Tall Solid Front and Side 864

Kit, Tall Solid Front and Side 1064

FIT 72" SERIES ACCESSORIES (CONTINUED)

Kit, Solid Front and Fence-Style Side 1472

Kit, Short Solid Front and Side 1072

Kit, Short Solid Front and Side 1272

Kit, Short Solid Front and Side 1472

Kit, Tall Solid Front and Side 1072

Kit, Tall Solid Front and Side 1272

Kit, Tall Solid Front and Side 1472

FIT 81" SERIES ACCESSORIES (CONTINUED)

Kit, Solid Front and Fence-Style Side 1681

Kit, Short Solid Front and Side 1281

Kit, Short Solid Front and Side 1481

Kit, Short Solid Front and Side 1681

Kit, Tall Solid Front and Side 1281

Kit, Tall Solid Front and Side 1481

Kit, Tall Solid Front and Side 1681

FIT TILT SERIES ACCESSORIES (CONTINUED)

Tall Stone Guard Kit, Tilt82 (Use With #19486)

Tall Single Side Rail Kit, Tilt1072 (Use With #16789)

Tall Single Side Rail Kit, Tilt1282 (Use With #19486)

Tall Single Side Rail Kit, Tilt1482 (Use With #19486)

Side Kit, Tilt1072

Side Kit, Tilt1282 - Includes #18607 Corner Post & 11242 Pockets

Side Kit, Tilt1482 - Includes #18607 Corner Post & 11242 Pockets

AUX SERIES ACCESSORIES

Quickslide Tie Down - Eyebolt

Quick Slide Tie Down

Wheel Chock Kit

Quickslide Wheel Chock Kit

3/8" D-Ring Tie Down Kit (4 PCS)

Electric Winch Kit, Hauser (Battery Not Included)

3/8" 5000# Tie Down Kit (2 PCS)

AUX SERIES ACCESSORIES (CONTINUED)

HD Bi-Fold Ramp AUX

Kit, Utility Box AUX

Spare Tire Carrier Kit

HD Long Bi-Fold Ramp w/HD Ramp Arm Kit

Kit, Wheel Stop 81

Kit, HD Twin Ramp (Front Mount) (Use With #19266)

ADDITIONAL LIGHT OPTIONS

DESCRIPTION

Light, 2 1/2" Round Amber Clearance

Light, 2 1/2" Round Red Clearance

Grommet, 2 1/2" Round

Bracket, License Plate Light Kit

Tail Light, Oval

Bracket, License Plate (Plastic)

Light, 2" Round Red Clearance

Grommet, 2" Round

Lens, Side and Tail - LXT/XTV

Reflector, Amber

Light, 2" Round Amber Clearance

Grommet, Rectangle Clearance Light

Light, Rectangle License Plate, Clear

Reflector, Red

Grommet, Oval Tail

Light, Rectangle Clearance, Red

Light, Rectangle Clearance, Amber

Tail Light, RH (LXT/XTV/DOP)

Tail Light, LH (LXT/XTV/DOP)

Reflector, Amber - AUT

Light, ID Bar

Light, 2 1/2" Round Red Clearance - WCII

Grommet, 2 1/2" Closed Black

Amber Clearance Light - WAVE (2015)

Red Clearance Light - WAVE (2015)

DESCRIPTION

Light, Rect. Clearance Red - Enc.

Light, Rect. Clearance Amber - Enc.

Bracket, W/180 Bullet - (07846/07847)

LED Light, 2" Round Clearance, Red

LED Light, 2 1/2" Round Clearance, Red

LED Light, 2 1/2" Round Clearance, Amber

LED Light, Oval Tail Light

Light, Clearance Amber STICKON - LXT

Lens, Amber LXT

LED Light, Clearance - 4" Rec. Red - Enc.

LED Light, Clearance - 4" Rec. Amber - Enc.

LED Light, Clearance - 2 1/2" Rec. Red - Enc.

LED Light, Clearance - 2 1/2" Red - Super 10

LED Light, Clearance - 2" Round, Amber

LED Light, Clearance Rect., Amber

Light, Halogen

Light, Fender Clearance Combo

LED Light, License Plate

LED Light, Round White Flush Mount

LED Tail Light, Bar w/Reflex

LED Marker Light, Bullet Red W/Grom

LED Marker Light, Bullet Amber W/Grom

Tail Light Bar LED - Vault/Enc.

LED, CID Bar

Tail Light Oval LED - WAVE

ADDITIONAL TIRE OPTIONS

DESCRIPTION

Tire & Wheel, 18.5X8C Silver

Tire & Wheel, 20.5X10C Silver

Tire & Wheel, ST175/80D13C Silver

Tire & Wheel, 4.80X8C Silver

Tire & Wheel, 5.30X12C Silver

Tire & Wheel, ST205/75R14 Alum.

Tire & Wheel, 4.80X12C Silver

Tire & Wheel, ST205/75D14 Silver

Tire & Wheel, ST175/80R13D White

Tire & Wheel, 20.5X10E Silver

Tire & Wheel, ST205/75D15C Silver

Tire & Wheel, ST145/R12E Silver

DESCRIPTION

Tire & Wheel, ST175/80R13D Alum.

Tire & Wheel, ST205/75 R15C White

Tire & Wheel, ST145/R12E Alum.

Tire & Wheel, ST225/75R15E Alum.

Tire & Wheel, ST205/75 R-15 D-5 White

Tire & Wheel, ST205/75R-15 D-5 Alum.

Tire & Wheel, ST175/80R13C Silver

Tire & Wheel, ST175/80R13C Alum (use 09475)

Tire & Wheel, ST205/75R14C Silver

Tire & Wheel, ST225/75R15E White

Tire & Wheel, 20.5X10E Alum. Gun Face

Tire & Wheel, 20.5X10E Alum. Gun Inlay

GALVANIZED TIRE/RIMS

Tire & Wheel, ST175/80D13C Galvanized

Tire & Wheel, 5.30X12C Galvanized

Tire & Wheel, 4.80X12C Galvanized

Tire & Wheel, ST145/R12E Galvanized

SPARE PARTS

Spare Tire Mount - U Bolt Style

Spare Tire Carrier

Hardware Kit For #22008 If Not Mounted to Jack

Acorn Lugnut (10/Bag)

Hub Cap End - ABS